
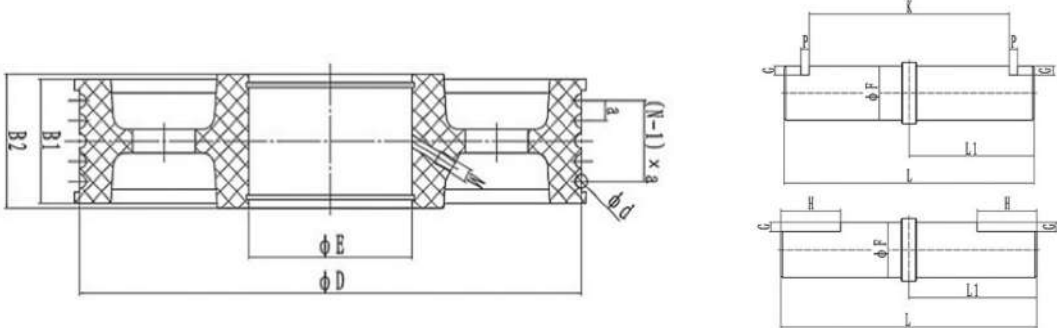
		DOC. NO.	FR.200.0012.EN				
		DOC. DATE	01/03/2023				
<b>MARGA Elevator Driving Sheave ORDER LIST</b>							
Order date:	3/2/2023	Delivery date:					
Contract no.:		Qty:	414				
Material	<input checked="" type="checkbox"/> MC-NYLON NORMAL <input type="checkbox"/> MC-NYLON ENHANCED <input type="checkbox"/> Cast Iron <input type="checkbox"/> Other:						
Elevator type	<input checked="" type="checkbox"/> Traction Elevatoes <input type="checkbox"/> Hydraulic Elevators <input type="checkbox"/> Industraial Elevators <input type="checkbox"/> Other:						
<b>Elevator type</b>							
Fig.	Roping	Roping method	Principal use				
A	1 : 1	Half wrap (Single wrap)	Mid - Low speed elevators				
B	1 : 1	Full wrap (Double wrap)	High speed elevators				
C	1 : 1	Drum winding	Home elevators				
D	1 : 1	Drum winding	Small , low - speed elevators				
E	2 : 1	Full wrap (Double wrap)	High speed elevators				
F	2 : 1	Half wrap (Single wrap)	Freight elevators				
G	2 : 1	Half wrap (Single wrap)	Machine- room-less elevators				
H	3 : 1	Half wrap (Single wrap)	Large freight elevators				
I	4 : 1	Half wrap (Single wrap)	Large freight elevators				
							
<b>Auxiliary parameters</b>							
NO.	Elevator type	Rated load	Car weight	Speed	Traction ratio	Pulley location	Number / unit
1	F & G	630 kg	700~800 kg	1~1.6 m/s	2 : 1	Car & CWT	222
2	F & G	1000 kg	950~1200 kg	1~1.6 m/s	2 : 1	Car & CWT	192
<b>Parameters of sheave dimension</b>							
NO.	Pitch diameter $\phi D$	Inner diameter $\phi E$	Groove number N	Diameter of wire rope $\phi d$	Distance between grooves a	Pulley width / hub B1/B2	Oil hole M
1	320 mm	120~130 mm	5	8 mm	12 mm		YES
2	400 mm	120~130 mm	5	10 mm	15 mm		YES
<b>Parameters of shaft dimension</b>							
NO.	F	G	H	L1	L	K	P
1	60 mm						
2	60 mm						
							
<b>ACCESSORIES</b>							
Protect cover	<input type="checkbox"/> With <input checked="" type="checkbox"/> Without						
Spare parts	<input type="checkbox"/> With <input checked="" type="checkbox"/> Without						
Maintenance instructions	<input checked="" type="checkbox"/> With <input type="checkbox"/> Without						
Product certificate	<input type="checkbox"/> Product Name <input type="checkbox"/> Design NO. <input type="checkbox"/> Order NO. <input checked="" type="checkbox"/> Production date <input checked="" type="checkbox"/> Shaft specifications <input checked="" type="checkbox"/> Bearing specifications <input checked="" type="checkbox"/> Wheel specifications <input checked="" type="checkbox"/> serial number <input type="checkbox"/> Other:						
Package	<input type="checkbox"/> Domestic <input checked="" type="checkbox"/> Export <input type="checkbox"/> Other:						
Shipping mark							
Other							
Remark:	1- Elevator MC-Nylon SHEAVE without shaft. 2- Bearings should be of HRB brand. 3-Do not assemble the bearing on the sheave.						
Filled by		Date					